

**VARIO  
mat4**

**Material:**  
Polyethylene, high molecular


**Dimensions in mm:**  
2110 x 4110 x 45,5 (incl. profile)

**Weight per panel:**  
Approx. 354 kg







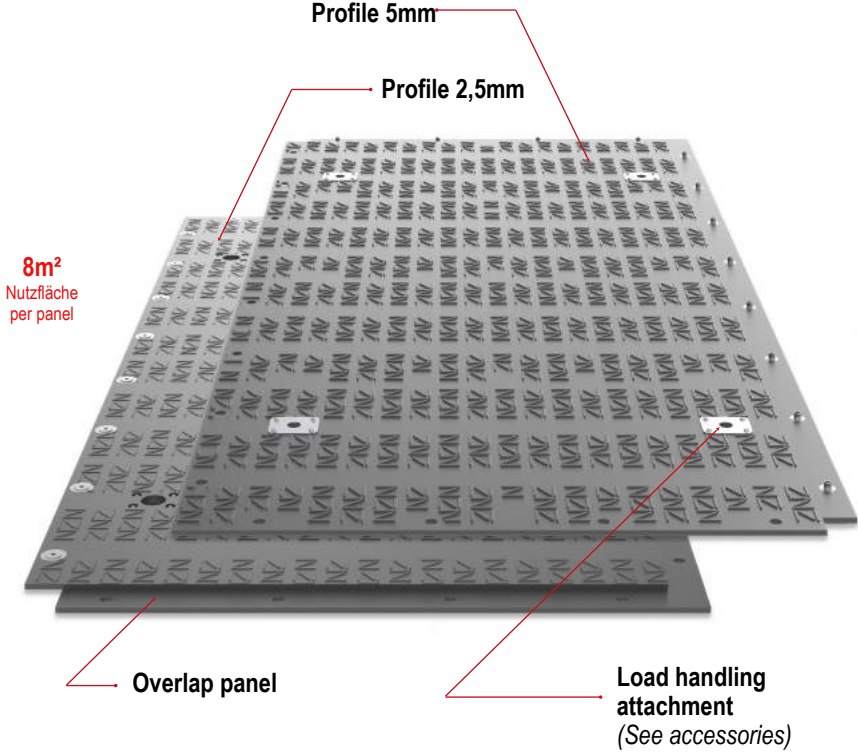


**Surface and colour:**  
5mm & 2,5mm Profile  
black-coloured

**Load capacity:**  
approx. 260t (depending on the surface)

**Transport per truck:**  
50 pcs (400m<sup>2</sup>)



**Areas of application:**

-  **Mobile crane sites**
-  **Heavy-lift transport**
-  **Mobile logistics**
-  **Wind power generator construction**
-  **Temporary walkways**
-  **Road construction and access roads**
-  **Line construction**
-  **Concerts and events**
-  **Mobile parking lots**






## General information

### Unloading:


The panels can be unloaded from a lorry using a forklift truck. When lifting, special care must be taken to ensure that the panels cannot slip or fall off. The panels can also be unloaded and installed using a crane.

**Storage:** Never stack directly more than 3 panels at a time. It is recommended to stack a maximum of 4 packs of 3 panels on top of each other. Each package can be separated by 4 square timbers (100mmx100mm) to allow later lifting by forklift truck.

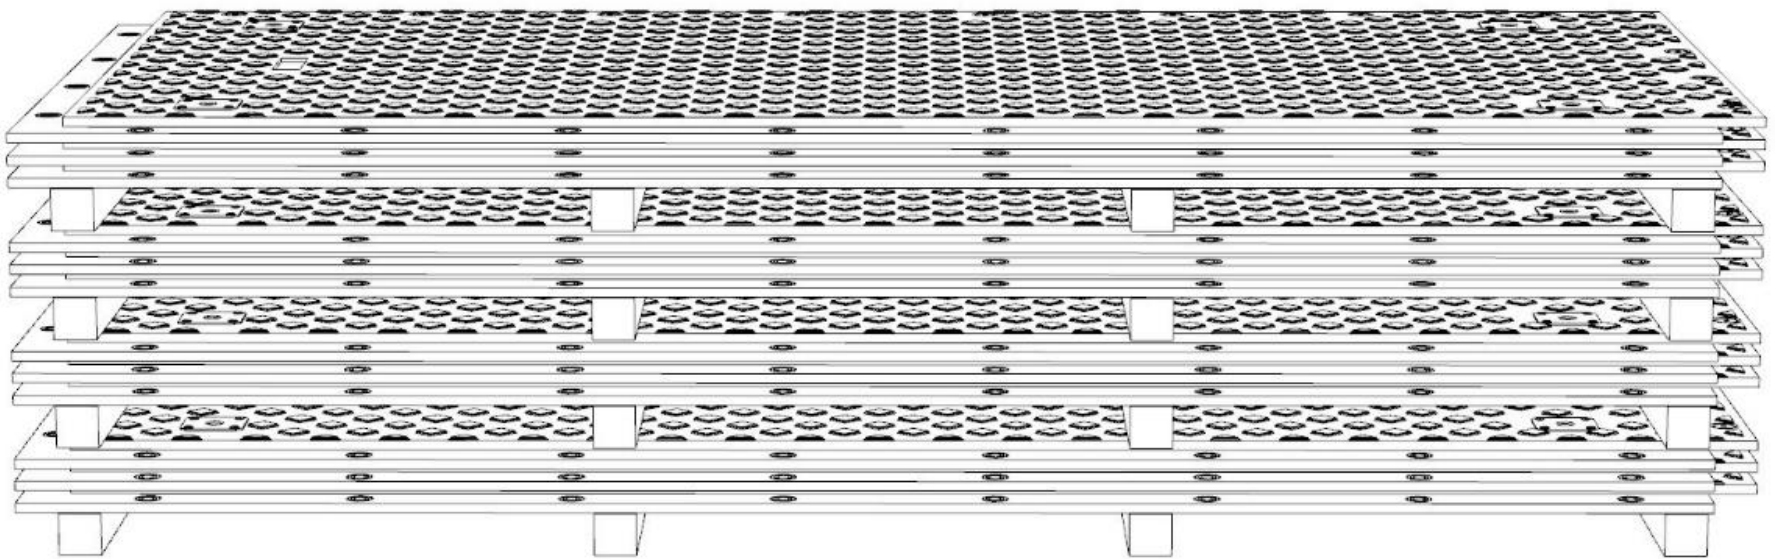

### Use of the panels:

Single-sided use. The upper side has a high profile surface (suitable for the use of construction vehicles).

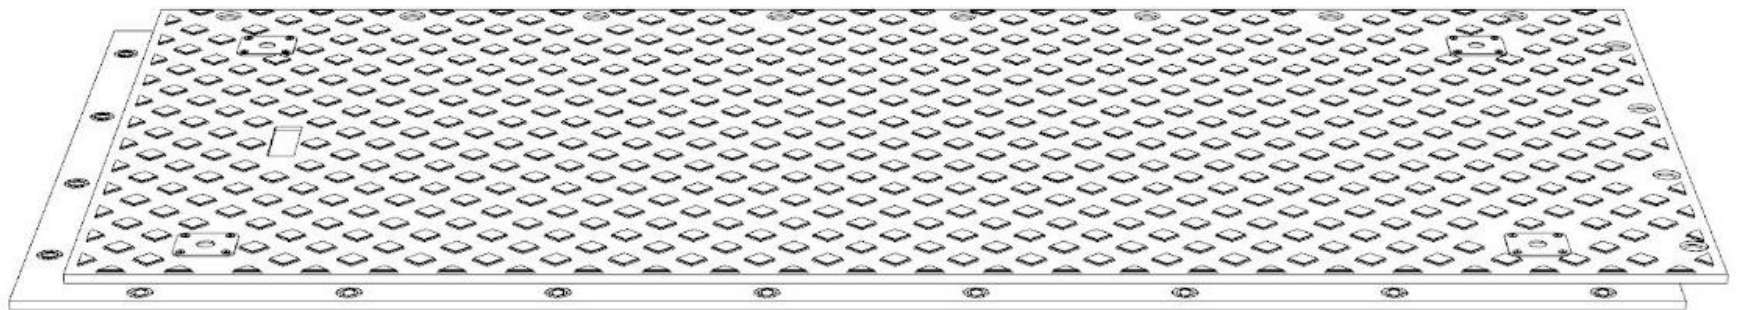





# VARIO mat 4

## Lifting and laying:

Each panel has 4 lifting lugs. A lifting device must be inserted into each eyelet. These devices must in turn be connected to a lifting hook (on a chain sling).

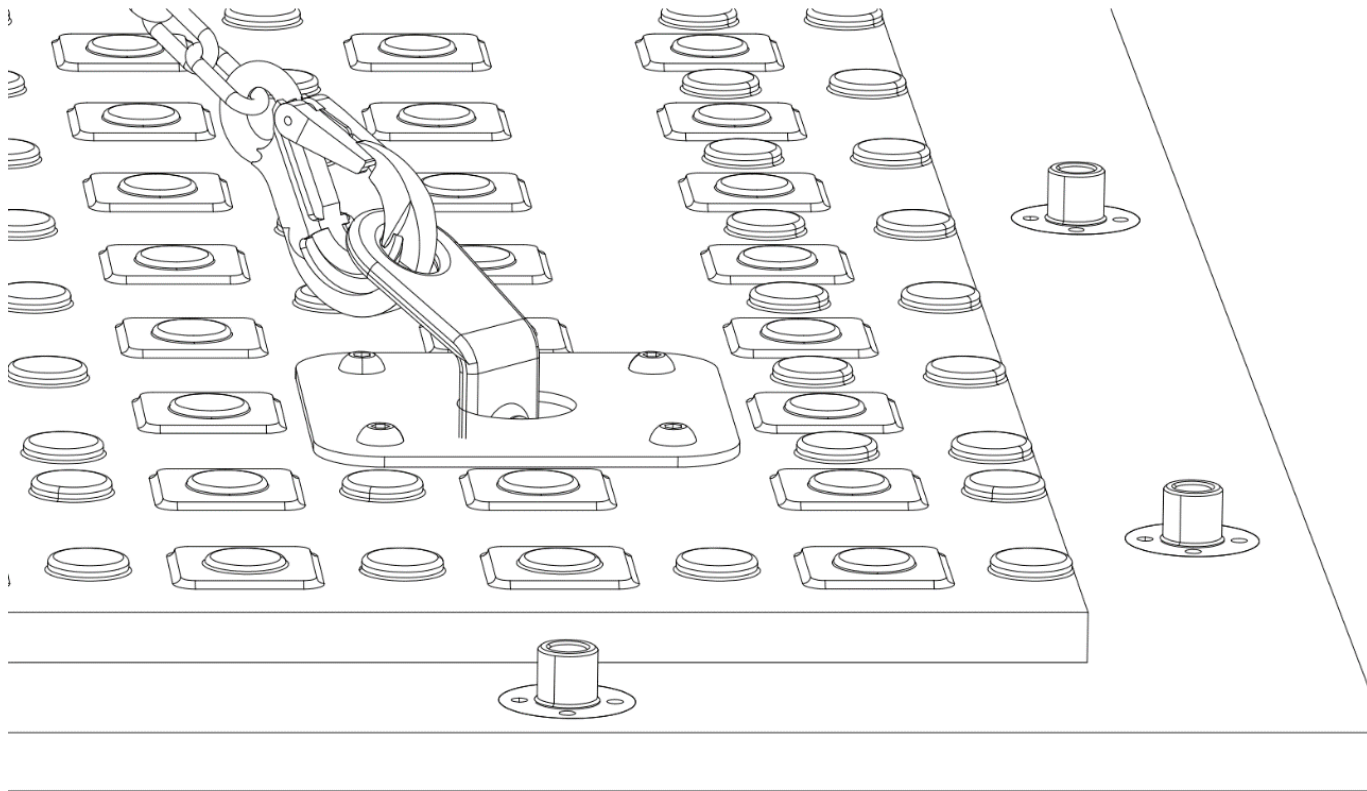


With the help of the chain sling, the panel can be moved to the desired position and installed.

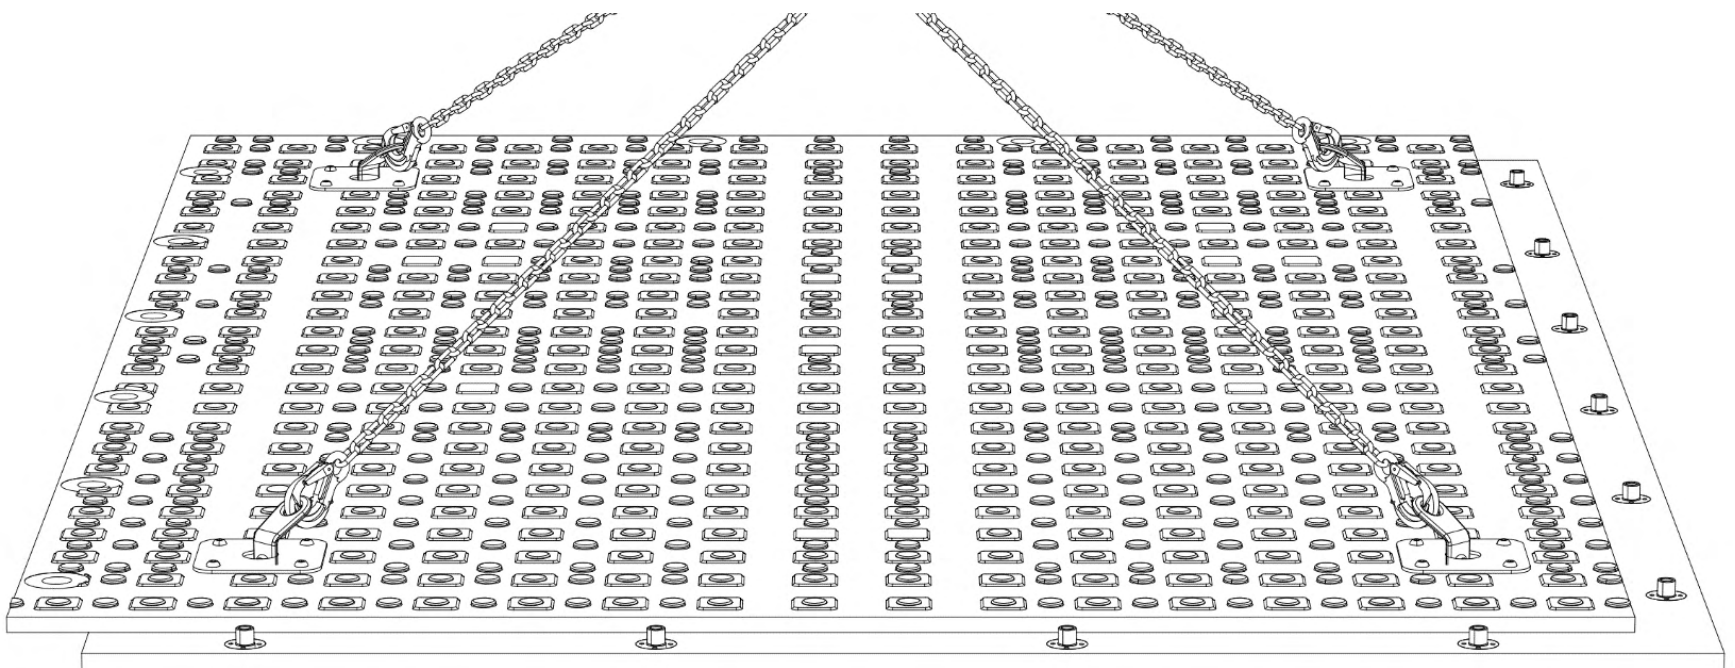




## Connecting the panels:

The panels are connected and screwed together using washers and screws (M16x40mm). All adjacent panels must be connected in this way. Always install the panels so that the surfaces of the same type face upwards.

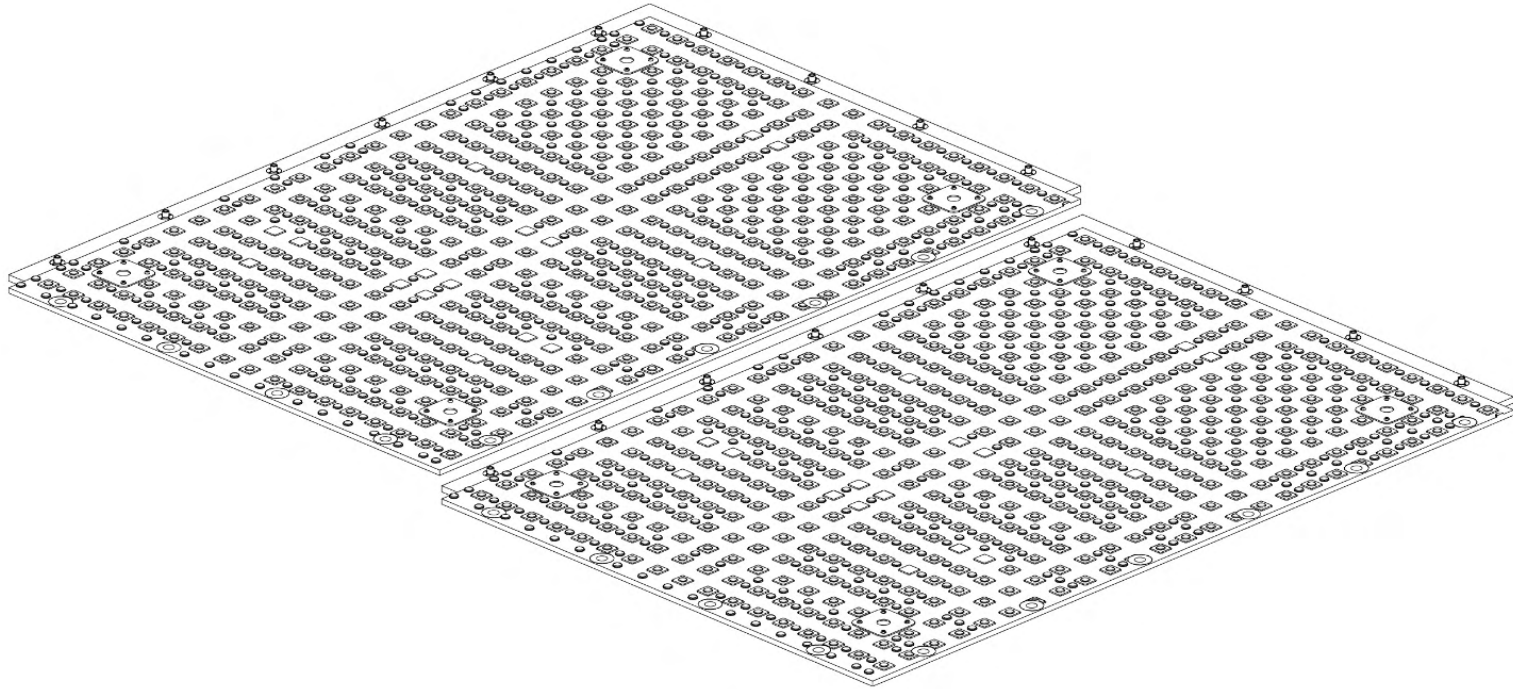

## Connecting the panels together (vehicle side):

The panels are connected and screwed together using washers and screws (M16x40mm). All adjacent panels must be connected in this way. Always install the panels so that the surfaces of the same type face upwards.

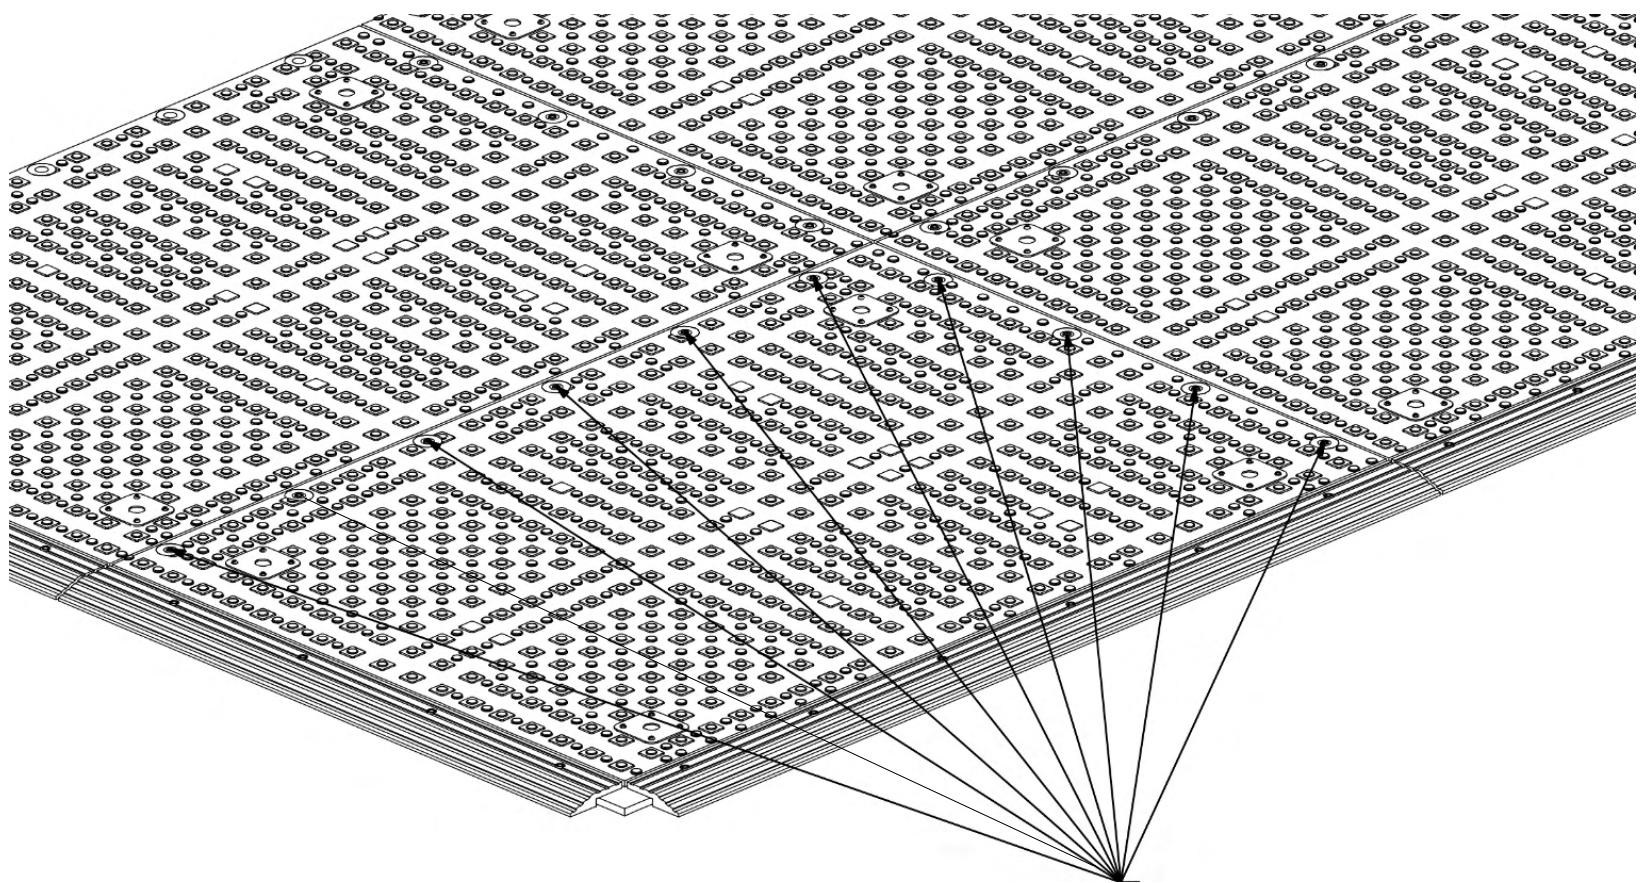

4m side: 8x screw M16x40, 8x washer  
2m side: 4x screw M16x40, 4x washer



# VARIO mat 4

## Connecting the panels to the ramps (vehicle side):

The panels are connected and screwed together using washers and screws (M16x40mm). All adjacent panels must be connected in this way. Always install the panels so that the surfaces of the same type face upwards.

